



4-way RF remote included



Advanced rotation mechanism



RF control



VESA  
200-600



Easy  
stroke  
adjustment



Motor  
protection



5 years  
warranty



Cable  
management



RJ45  
socket compatible  
accessories  
on page 34

## Specification

Product ID	K-1ROTOLIFT	K-2ROTOLIFT	K-3ROTOLIFT
Lifting height	720mm 28"	840mm 33"	950mm 38"
Angle of rotation	left-270°, right-90°		
Max. load	30kg (65lb)	50kg (110lb)	60kg (130lb)
Lifting speed	20mm/s		
Rotation speed	1.5rpm		
Safety system	Automatic weight system		
Power consumption	80W		
Power supply	115V/230V		
Control	RF remote		
Warranty	5 years		
Available plugs	B, F, G, I, J, M		

## Characteristics

- Swivels 270° left and 90° Right after rising to adjusted height
- Unique, Patented weighting safety system makes the lift safer than any standard requirements
- Top and Down position can be determined easily from the setup mode
- 10 Watt brushless DC motor for swivel with patented built-in clutch prevents doing damage to any obstacles
- Control box equipped in a socket used for powering the TV
- Power Guard Feature will cut off the power if any user tries to hide an active TV
- Universal TV Bracket, suitable for all screens with VESA standards from 400 to 600 and everything in between
- 24V Electric motor with Overheat protection




## Characteristics

- Available with all commonly used plugs in 230 and 120 Volt
- Smooth aesthetic look of anodized aluminum and black matte powder coated steel
- Supplied with pre-programmed 4-way SABAJ RF-Remote
- Compatible with optional automatic lid - the AUTOLID
- Easy set-up and installation
- Instructional movies, CAD and PDF drawings available for download



## Dimensions [mm]

Measure	K-1 ROTOLIFT	K-2 ROTOLIFT	K-3 ROTOLIFT
A	702	816	881
B	508	658	658
C	112	112	112
D	530	600	700
E	700	814	879
F	100-460	100-610	100-610

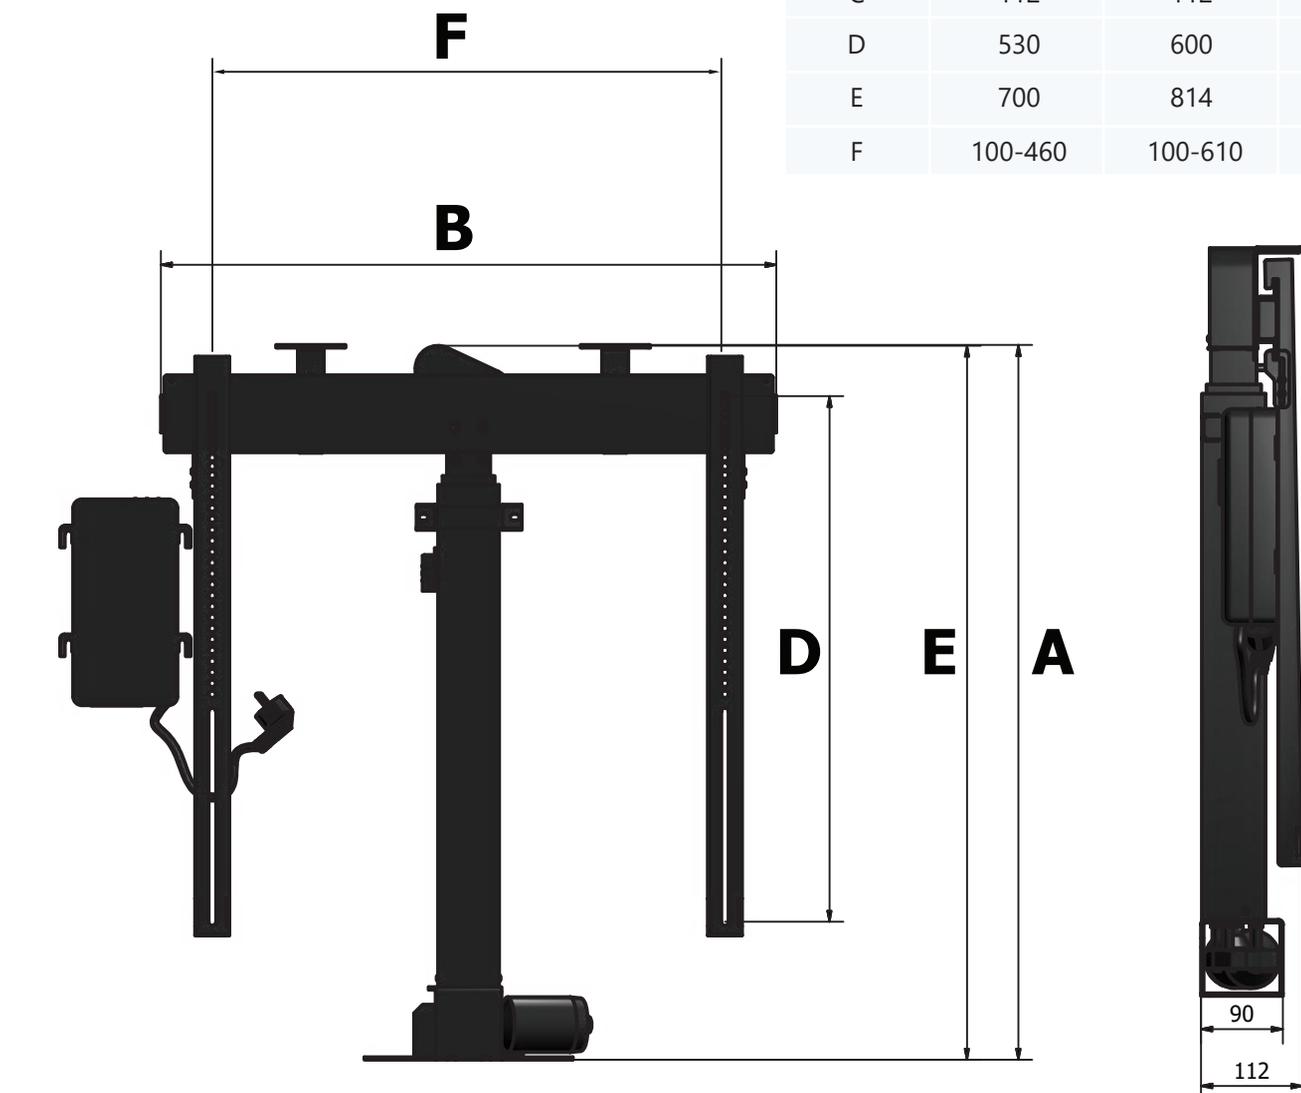


## Specification

Product ID	AUTOLID
Max. lid weight	5kg (11lb)
Furniture width (adjustment)	1340±1380mm
Min. furniture height	870mm (recommended)
Lifting speed	4cm/s
Power consumption	12W (from control box)
Power supply	24V (from control box)




## Characteristics

- Automatic lid option designed, but not limited to the RotoLift series
- Built-in clutch prevents doing damage to any obstacles
- Requires a professional to install
- Works coherently with lifting mechanisms thanks to pre-designed control box
- Smooth and fast movement thanks to 20W brushless electric motor
- Capable of lifting lids up to 4 kg
- One size fits all

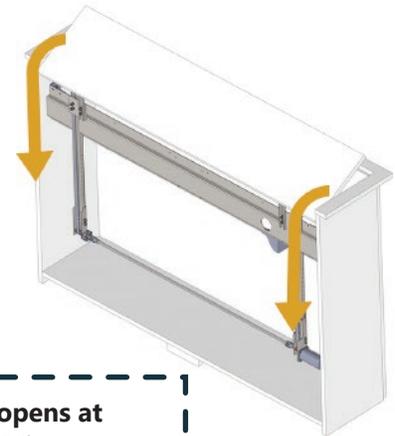

**The flap opens at an angle of 90° degrees**

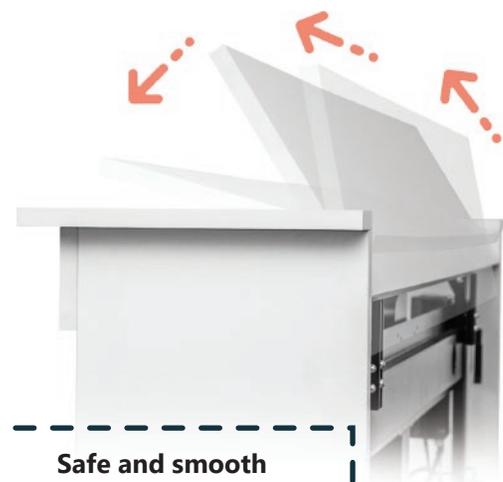

**Safe and smooth opening/closing of the lid**

